




# > APR400

Ideal for rough materials  
Very good printing quality  
High resistance to smudge


APR®400 is the newest inkanto wax/resin ribbon for Near Edge and Corner Edge printers. It is dedicated to print rough label materials like uncoated papers or tags, a challenge for TT ribbons. APR®400 achieves a very good printing performance on these materials thanks to its superior coverage capacity. Its high sensitivity enables the highest printing speeds in labeling applications.

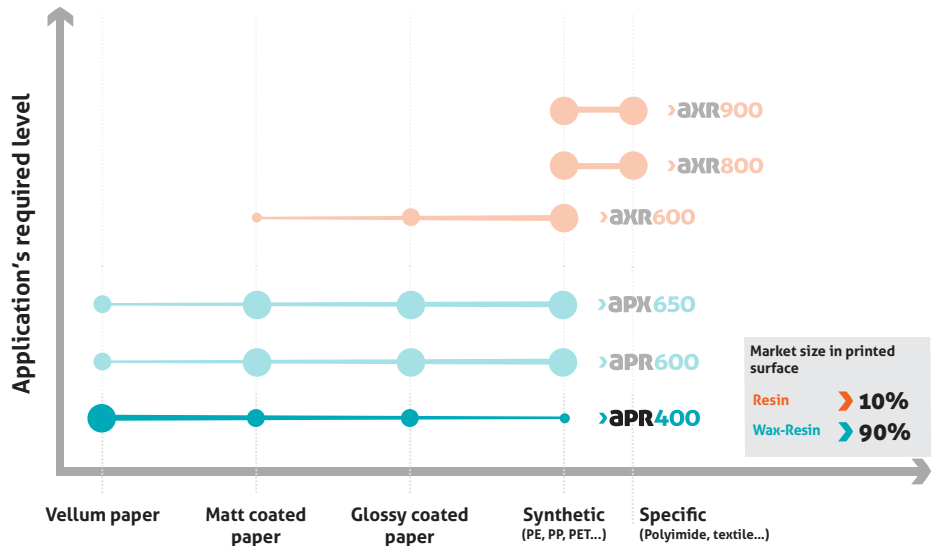


## Printing receptor

papers		synthetics	
Vellum	● ● ●	PP	● ○ ○
Coated	● ● ○	PE	● ○ ○
Glossy coated	● ● ○	PET	● ○ ○

## Printer settings

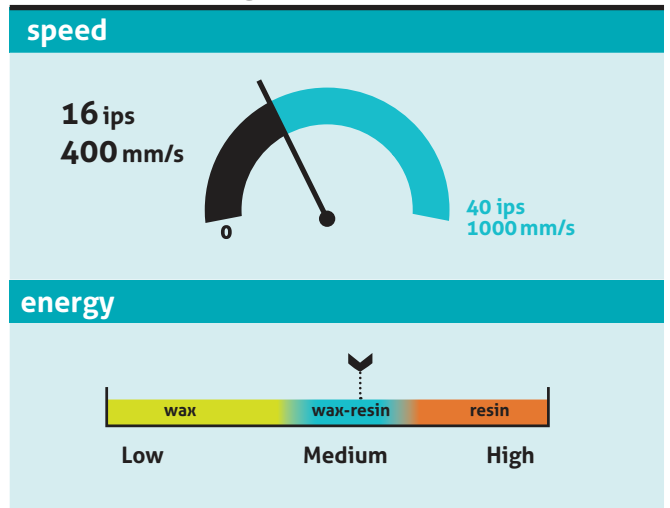

## Print resistance

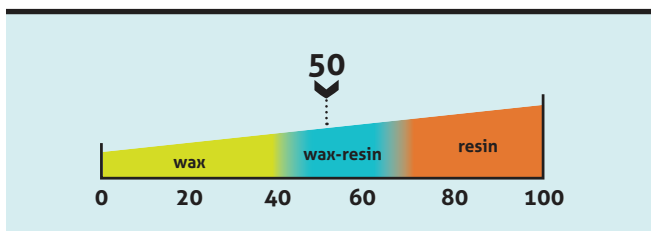

## Compliant with the following regulations

REACH / SVHC 1907/2006/EC
Food Contact 1935/2004/EC
Heavy metals 2011/65/EU
California Proposition 65
Halogen restrictions

## Your ribbon identity

Colours: ●


Length (m): .....

Width (mm): .....

Part number: .....

Your distributor: .....


Contact : .....





# > APR400

## Application fields

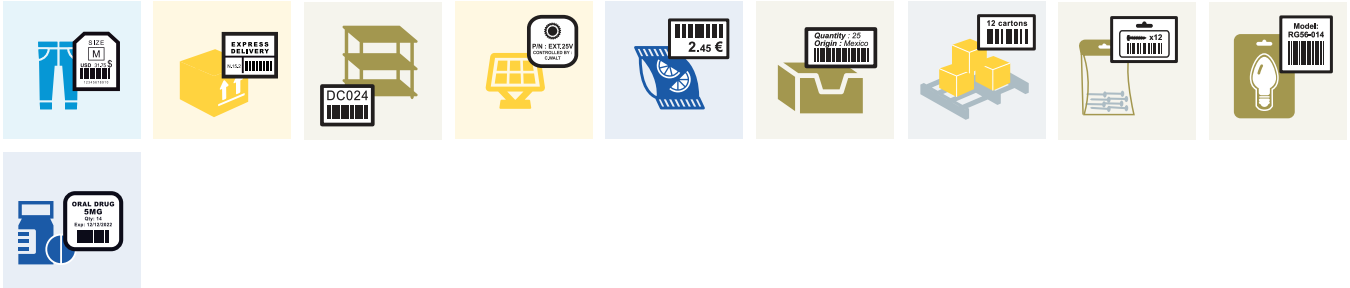


## Product performance

print quality					
90°Barcode	80	A <sub>a</sub> Small characters	90	Logos	95
0°Barcode	100	2D Barcode	88	Blackness	1,8 ODR*
technical resistances					
Heat	100°C 212°F	Light/Blue Wool	>7	Solvents	100
Water/Submerge	100	Rubbing	60		

## Product physico-chemical features

product structure	
<b>PET film</b>	Thickness: 4,5 µm
<b>Ink</b>	Wax-Resin
Melting point	80°C/176°F
<b>Backcoating</b>	Silicon based
Coefficient of Friction	Kd < 0.2
<b>Ribbon thickness</b>	< 8 µm
The ribbon is anti static build-up treated	

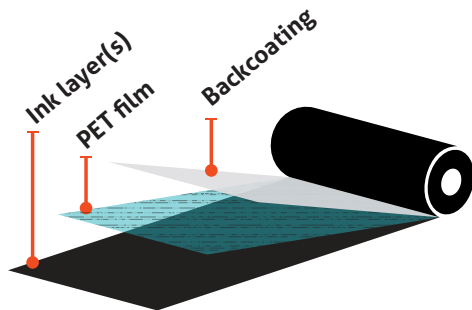

## Storage

### storage conditions

12 months recommended

20-80 % Humidity Rate, 5-35°C (40-95°F)

## Waste management

inkanto rolls and their packaging allow an optimised waste management. For more information please contact ARMOR.